
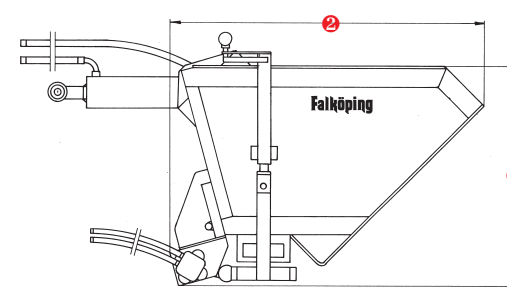


SKOPSPRIDARE

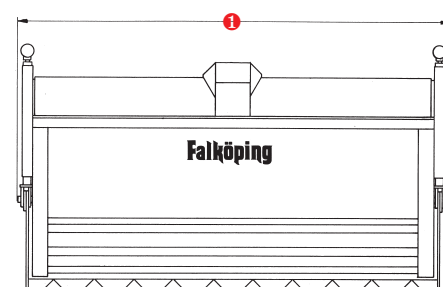

Tekniska data	S-25LM	S-20LM	S-11LM	S-11 S-11T	S-8 S8-T	S-5	S-3
Volym, m ³	2.5	2.0	1.1	1.1	0.8	0.5	0.3
Vikt, kg	650	575	340	340	265	220	190
Mått, mm	1 2630 2 1550 3 1180	2130 1550 1180	2130 1200 830	2130 1200 830	1630 1200 1200	1630 1080 710	1130 920 710
Räckvidd, km - sand	9	9	5	5	5	3	3
Spridningsbredd, m	2.5	2.0	2.0	2.0	1.5	1.5	1.0
Hydraulflöde l/min vid 30 km/tim	20-130	20-130	20-130	20-40	20-40	20-40	10-20
Hydraultryck min, bar	100	100	100	100	100	100	100
Lyftkraft, min, kp	4400	3600	2100	2100	1800	1500	1000
Ytbehandling:	Zinkmetalliserad, primer och 2-komponent topplack						
Extrautrustning:	Eluppvärmt utmatningsbord, Omrörare, Hydraulisk tryckstång (S3/S5), Elstyrd flödeskontroll						